

### Protective solutions

#### Applications

The KS-1000 and KS-1000-K are used as gastight closing valves of air ducts in Civil Defence and military shelters and industrial facilities. Temet gastight closing valves are primarily designed to separate contaminated and toxic-free spaces and to control the airflow between them.

#### Specification

Manufacturer of KS-1000 and KS-1000-K gastight closing valve is Temet, Helsinki Finland.

The KS-1000 and KS-1000-K gastight closing valve comprises a light metal alloy body with neoprene gaskets installed between two counter flanges. The closing part is a stainless steel flap installed within the body on a spindle with bearings. The flap can be locked in any position. All parts are effectively corrosion proofed: the valve body and the flap epoxy powder coated and other components galvanized.


#### Design Criteria

The KS-1000 and KS-1000-K gastight closing valve is made in accordance with the specific provisions issued by the Finnish Ministry of Interior. The KS-1000 and KS-1000-K gastight closing valves also meet the requirements of the Swiss Federal Office of Civil Defence. Test reports as well as additional test data are available upon request.


The valve is designed to function within the operating temperature range of -20 ...+55°C.

#### Leakage rate

The leakage through the KS-1000 and KS-1000-K gastight closing valves does not exceed  $4 \times 10^{-2}$  l/s corresponding to a pressure differential of 150 Pa across the valve. By pressurizing the void between the double flap of the KS-1000-K valve with clean air, the leakage flow across the valve can be completely eliminated.

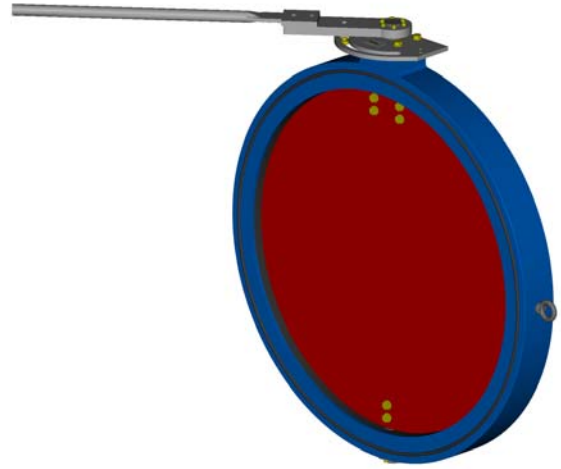


KS-1000 Gastight Closing Valve

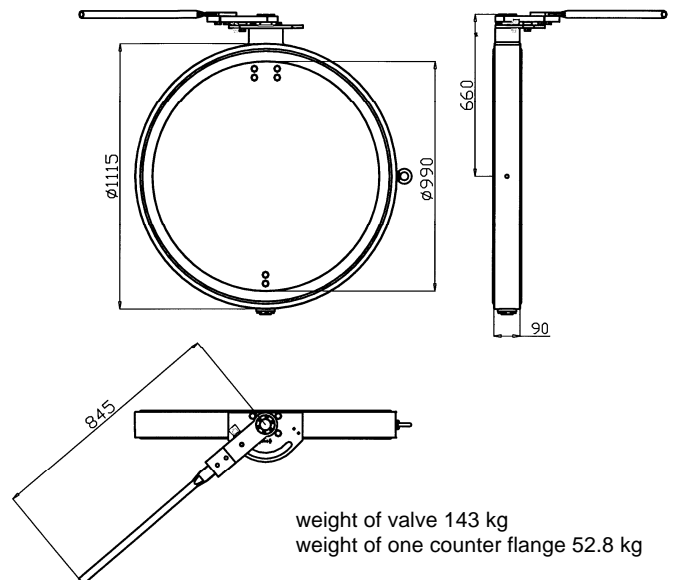

weight of valve 143 kg  
weight of one counter flange 52.8 kg


KS-1000 Gastight Closing Valve  
dimensions

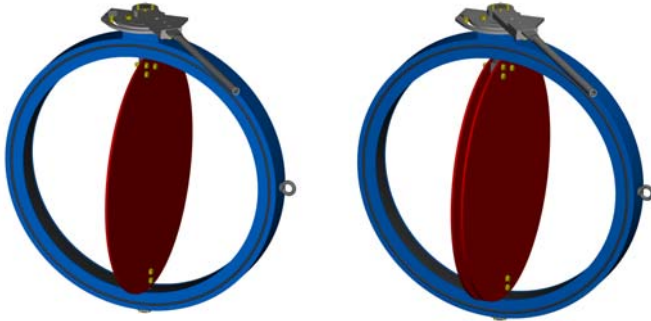

Accessories for KS valves:





KS valves are available provided with electric, electric fail-safe and pneumatic actuators.

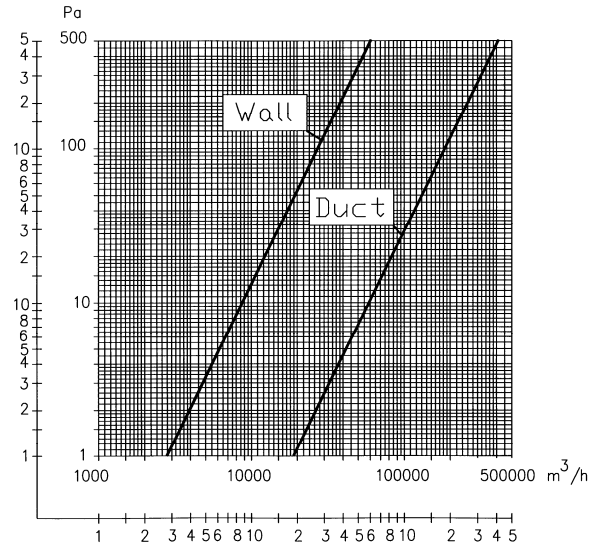

Air flow characteristics measured at 20 °C corresponding to air density of 1.2 kg/m<sup>3</sup>.

### ALSO AVAILABLE

- limit switches for the valve flap position indication
- alternate materials for special applications
- custom made wall sleeves etc.

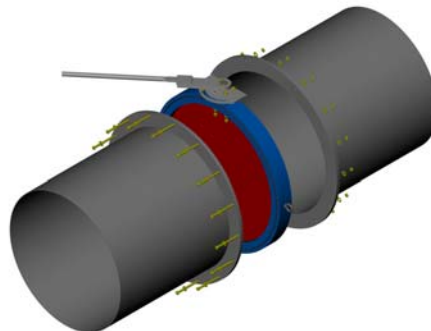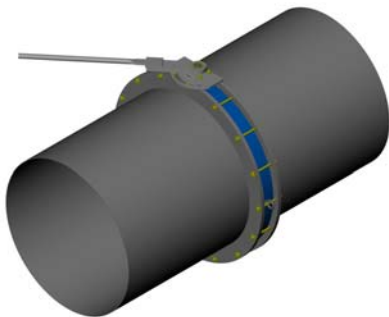

### Typical Installations of KS valves

Valves can be installed between ducts, into flanged wall sleeves, etc. Detailed instructions for installation, maintenance and use are attached to every valve delivered.

Design - Production – Installation – Maintenance - Consultation